




1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0		mw.Yang	08.20.2024	Y.Yang					

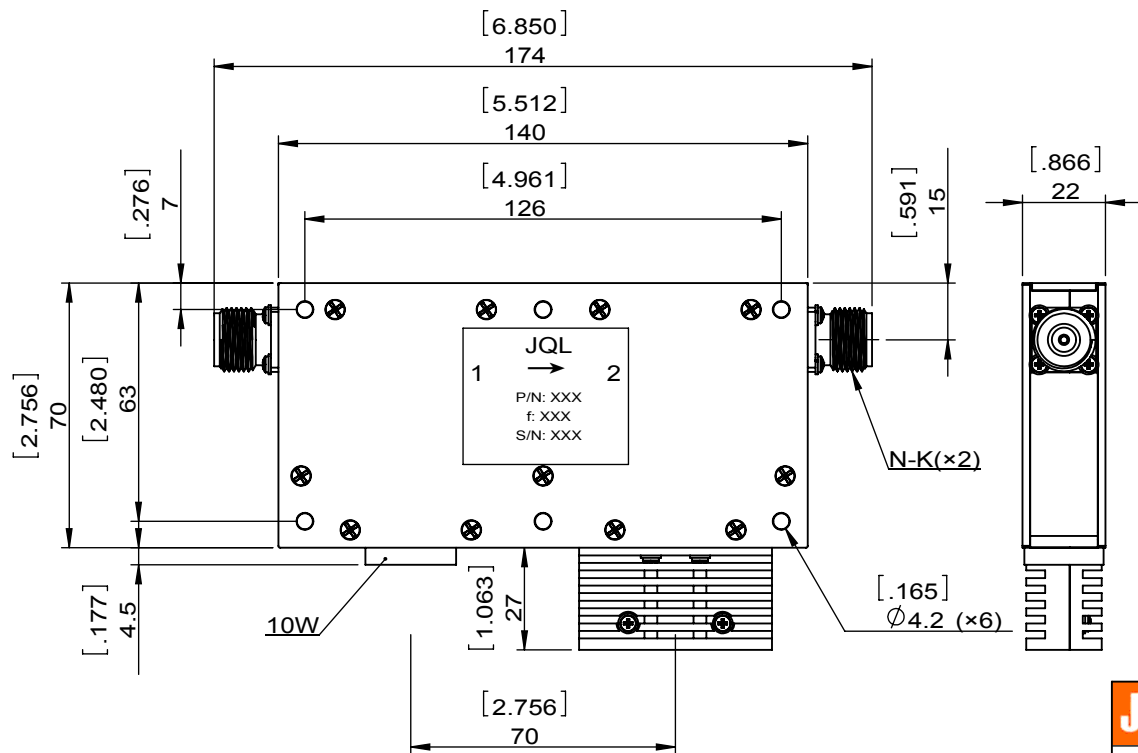

SPECIFICATIONS	
Part's Number	J12C0156T0162N10
Frequency(GHz)	0.156~0.162
Direction	CW
Insertion Loss(dB)MAX	0.8
Isolation(dB)MIN	50.0
Return Loss(dB)MIN	21.0
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	150/100/-
Operating Temperature(°C)	-10~+60
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	-
Tab(W×LG×THK)(mm[Inch])	-
Additional Notes	N-F

JQL JQL Technologies Corporation				
MATERIAL: STEEL		DWG NO: J12C0156T0162N10		
SURFACE TREATMENT: NICKEL PLATING		DWG BY:	mw.Yang	08.20.2024
DESCRIPTION: DUAL COAXIAL ISOLATOR		CHK'D BY:		SCALE
		APPV'D BY:		1:2
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First: 
				A4

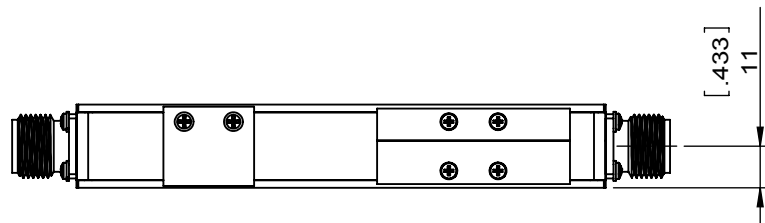

This document is the property of JQL Technologies Corporation. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Technologies Corporation.

WEIGHT: